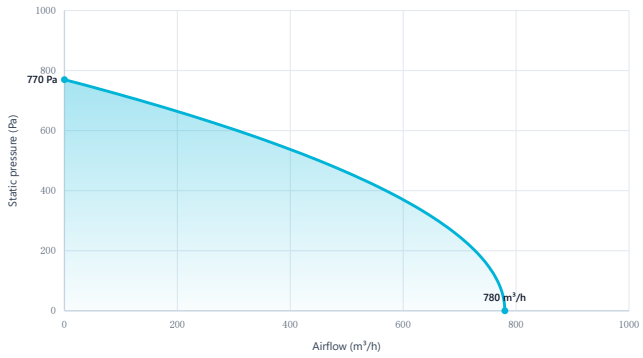
## PRODUCT OVERVIEW



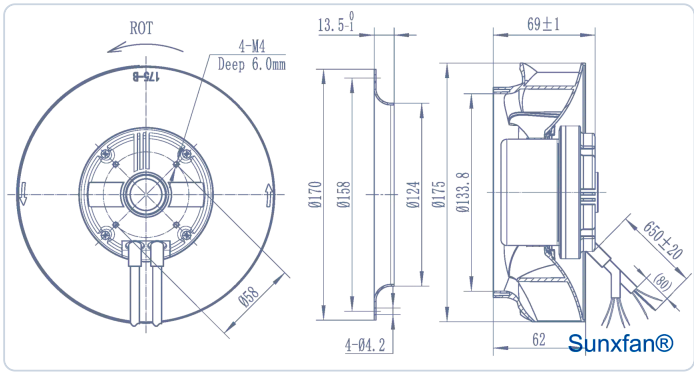

| | |
|---|---|
| Model | BC175B-E072D3-02 |
| Type | EC175 Backward-Curved Centrifugal Fan — 780 m³/h |
| Motor type | EC |
| Airflow | 780m³/h |
| Max. static pressure | 770 Pa |
| Voltage | 230 V AC |
| Power | 120 W |
| Current | — |
| Speed | 4500 r/min |
| Noise | 75 dB(A) |
| Protection class | IP54 |
| Working temperature | -25 °C ~ +60 °C |
| Impeller material | PA6+GF25% |
| Bearing | NSK ball bearing |
| Speed control | 0-10V/PWM, 3-speed |

## PERFORMANCE CURVES (AT RATED VOLTAGE)




Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

## DIMENSIONS (UNIT: MM)




## ORDERING INFORMATION

| | |
|---|---|
| MOQ | 432 PCS |
| FOB | FOB Nansha Guangzhou |
| Reference price | US$30–70 |
| Lead time | 25-30 days |
| Sample | Sample available |
| Payment terms | TT |
| Shipping port | Nansha Guangzhou OR Yantian Shenzhen |

## NOTES

Impeller material: PA6+GF25%


© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)