
PRODUCT OVERVIEW




Model	**BC190A-D072A8-01**
Type	**DC190 Backward-Curved Centrifugal Fan — 620 m³/h**
Motor type	**DC**
Airflow	**620 m³/h**
Max. static pressure	**500 Pa**
Voltage	**48 V DC**
Power	**58 W**
Current	**1.2±7% A**
Speed	**3000 r/min**
Noise	**63±2 dB(A)**
Protection class	**IP54**
Working temperature	**-25 °C ~ +60 °C**
Impeller material	**PA6+GF25%**
Bearing	**NSK ball bearing**
Speed control	**0-10V/PWM**

PERFORMANCE CURVES (AT RATED VOLTAGE)

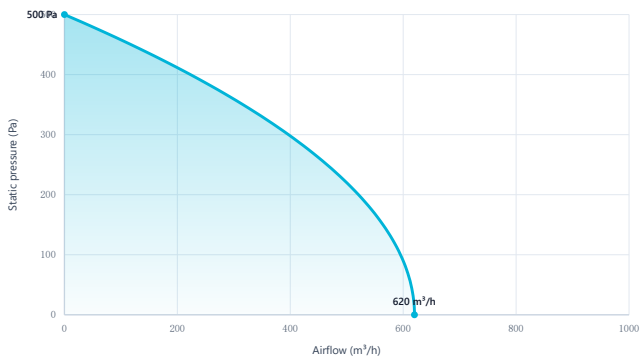

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

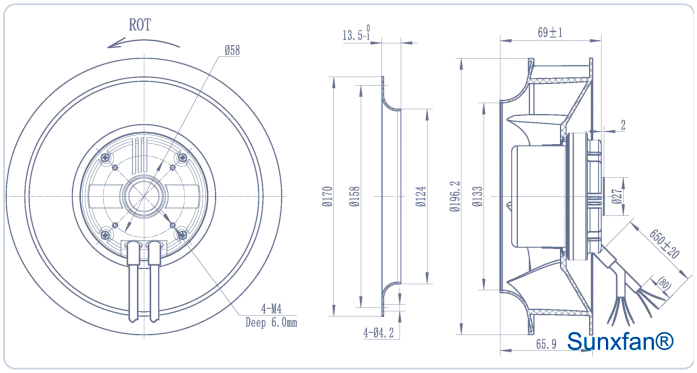

ORDERING INFORMATION

MOQ	**160 PCS**
FOB	**FOB Nansha Guangzhou**
Reference price	**US$35–80**
Lead time	**25-30 days**
Sample	**Sample available**
Payment terms	**TT**
Shipping port	**Nansha Guangzhou OR Yantian Shenzhen**

NOTES

Impeller material: PA6+GF25%

 © 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)