
PRODUCT OVERVIEW




Model	BC220A-D092A6-01
Type	DC220 Backward-Curved Centrifugal Fan — 960 m³/h
Motor type	DC
Airflow	960 m³/h
Max. static pressure	590 Pa
Voltage	24 V DC [16-28VDC]
Power	100 W
Current	4.5±5% A
Speed	3000 r/min
Noise	73±2 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	0-10V/PWM

PERFORMANCE CURVES (AT RATED VOLTAGE)

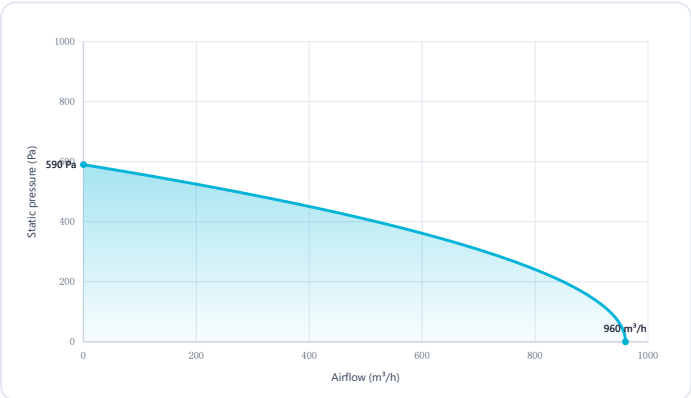

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

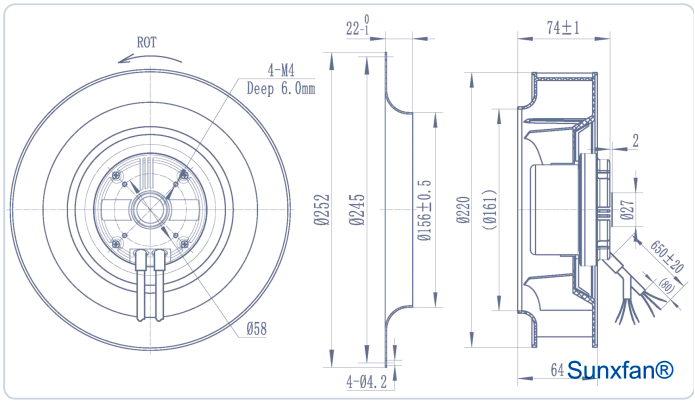

ORDERING INFORMATION

MOQ	280 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$39–95
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Impeller material: PA6+GF25%

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)