
PRODUCT OVERVIEW




Model	BC220B-E092D3-02
Type	EC220 Backward-Curved Centrifugal Fan — 1180 m³/h
Motor type	EC
Airflow	1180 m³/h
Max. static pressure	815 Pa
Voltage	230 V AC
Power	160 W
Current	—
Speed	3600 r/min
Noise	75 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	0-10V/PWM, Modbus RTU(RS485)

PERFORMANCE CURVES (AT RATED VOLTAGE)

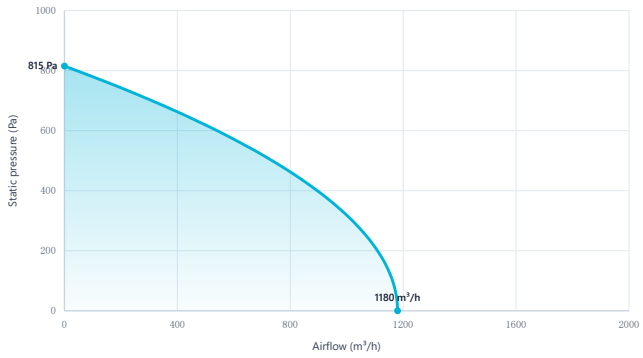

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

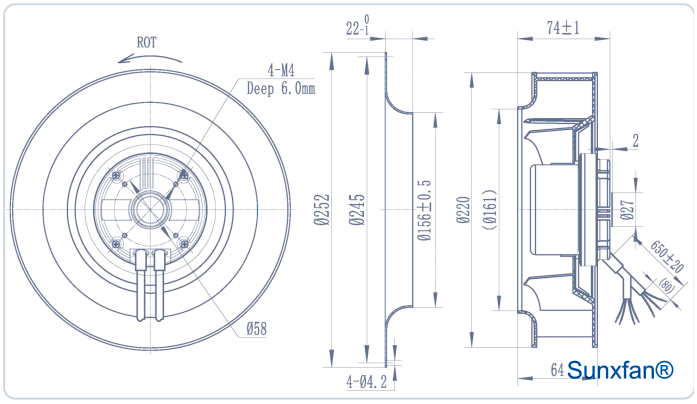

ORDERING INFORMATION

MOQ	280 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$39–95
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Impeller material: PA Or Galvanized steel plate (powder coating)

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)