
PRODUCT OVERVIEW




Model	BC225A-A092C2-01
Type	AC225 3-Speed Backward-Curved Centrifugal Fan — 1100 m³/h
Motor type	AC
Airflow	1100/890/750 m³/h
Max. static pressure	500 Pa
Voltage	230 V AC 50/60Hz
Power	120/95/87 W
Current	0.52/0.43/0.4 A
Speed	2515/2234/1930 r/min
Noise	69 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	3-speed

PERFORMANCE CURVES (AT RATED VOLTAGE)

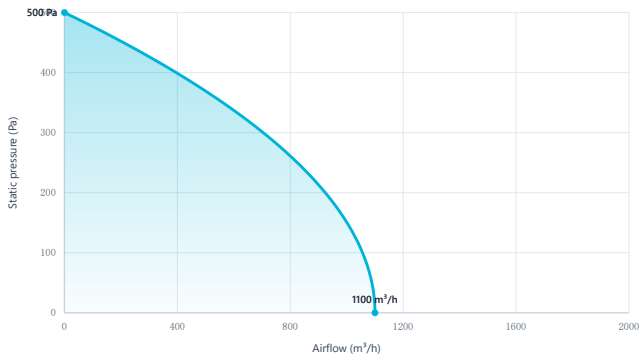

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

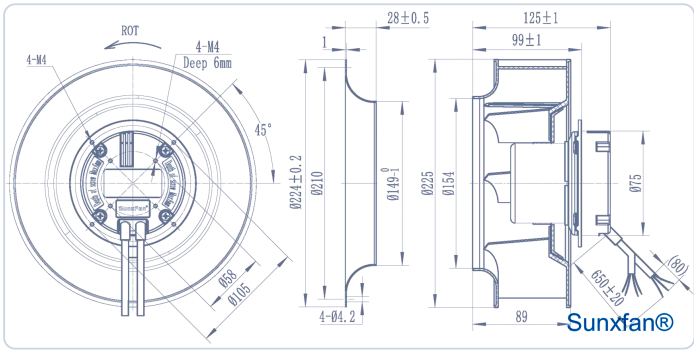

ORDERING INFORMATION

MOQ	160 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$40–110
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Impeller material: PA6+GF25%

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)