
PRODUCT OVERVIEW




Model	BC225A-E092D3-02
Type	EC225 Backward-Curved Centrifugal Fan — 1420 m³/h
Motor type	EC
Airflow	1420 m³/h
Max. static pressure	690 Pa
Voltage	230 V AC
Power	165 W
Current	—
Speed	3100 r/min
Noise	72 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	0-10V/PWM, Modbus RTU(RS485)

PERFORMANCE CURVES (AT RATED VOLTAGE)

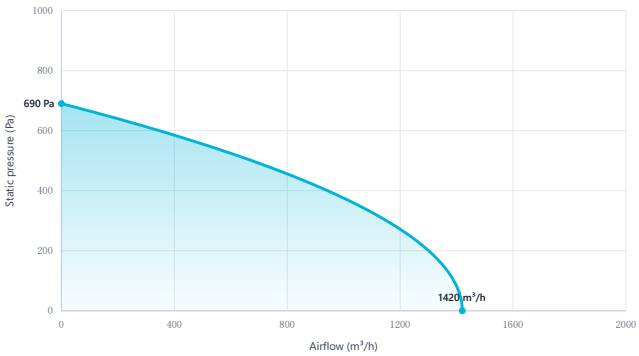

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

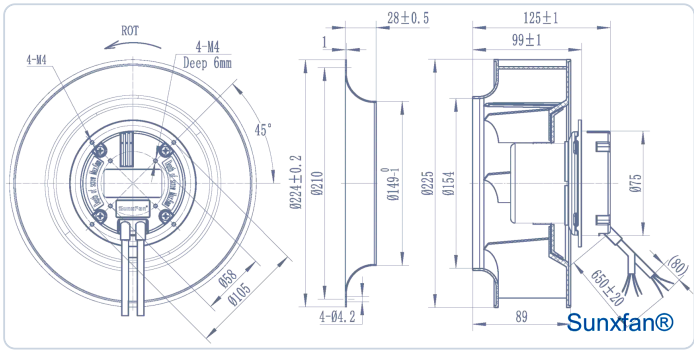

ORDERING INFORMATION

MOQ	160 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$40–110
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Impeller material: PA Or Galvanized steel plate (powder coating)

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)