
PRODUCT OVERVIEW




Model	BC250A-A092D3-01
Type	AC250 Backward-Curved Centrifugal Fan — 1400 m³/h
Motor type	AC
Airflow	1400/1800 m³/h
Max. static pressure	615 Pa
Voltage	230 V AC 50/60Hz
Power	175/230 W
Current	0.8/1.0 A
Speed	2600/2850 r/min
Noise	74 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	Galvanized steel
Bearing	NSK ball bearing
Speed control	3-speed

PERFORMANCE CURVES (AT RATED VOLTAGE)

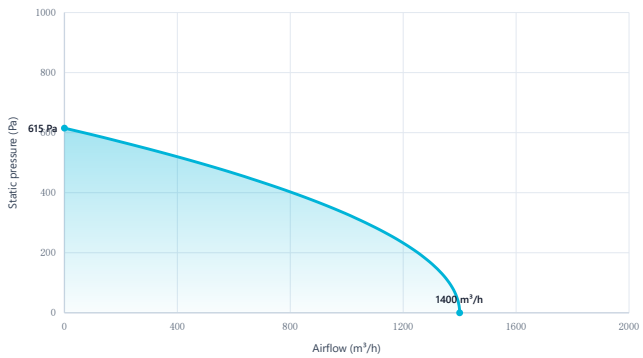

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

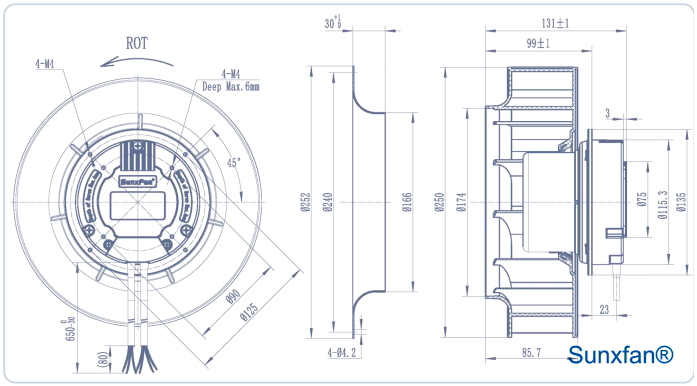

ORDERING INFORMATION

MOQ	160 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$45–125
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Impeller material: Galvanized steel plate (powder coating)

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)