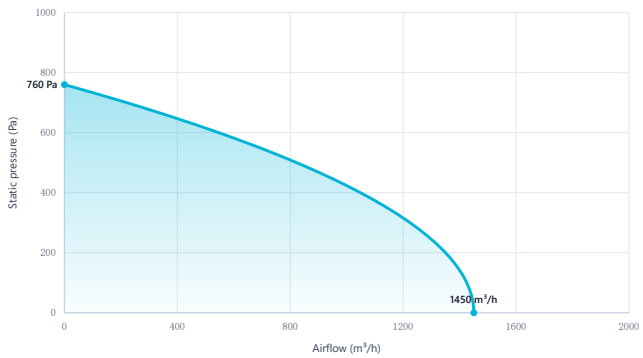
## PRODUCT OVERVIEW



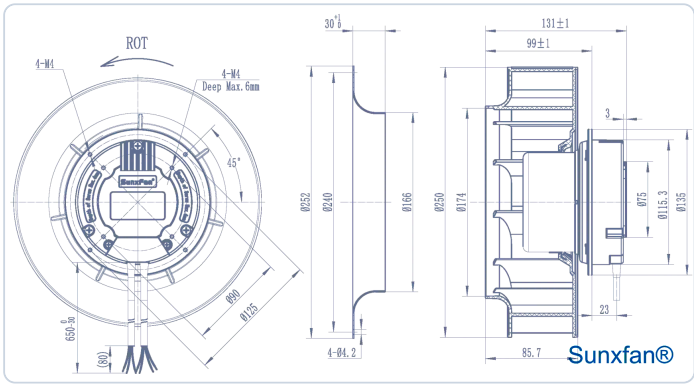

| | |
|---|---|
| Model | **BC250A-D092A8-01** |
| Type | **DC250 Backward-Curved Centrifugal Fan — 1450 m³/h** |
| Motor type | **DC** |
| Airflow | **1450 m³/h** |
| Max. static pressure | **760 Pa** |
| Voltage | **48 V AC** |
| Power | **160 W** |
| Current | **—** |
| Speed | **2600 r/min** |
| Noise | **71±2 dB(A)** |
| Protection class | **IP54** |
| Working temperature | **-25 °C ~ +60 °C** |
| Impeller material | **PA6+GF25%** |
| Bearing | **NSK ball bearing** |
| Speed control | **0-10V/PWM** |

## PERFORMANCE CURVES (AT RATED VOLTAGE)




Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

## DIMENSIONS (UNIT: MM)




## ORDERING INFORMATION

| | |
|---|---|
| MOQ | **160 PCS** |
| FOB | **FOB Nansha Guangzhou** |
| Reference price | **US$45–125** |
| Lead time | **25-30 days** |
| Sample | **Sample available** |
| Payment terms | **TT** |
| Shipping port | **Nansha Guangzhou OR Yantian Shenzhen** |

## NOTES

Impeller material: PA Or Galvanized steel plate (powder coating)

 © 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®) 