
PRODUCT OVERVIEW




Model	**BC250A-E072B3-01**
Type	**EC250 Backward-Curved Centrifugal Fan — 1080 m³/h**
Motor type	**EC**
Airflow	**1080 m³/h**
Max. static pressure	**590 Pa**
Voltage	**230 V AC**
Power	**120 W**
Current	**—**
Speed	**2000 r/min**
Noise	**64 dB(A)**
Protection class	**IP54**
Working temperature	**-25 °C ~ +60 °C**
Impeller material	**PA6+GF25%**
Bearing	**NSK ball bearing**
Speed control	**0-10V/PWM, Modbus RTU(RS485)**

PERFORMANCE CURVES (AT RATED VOLTAGE)

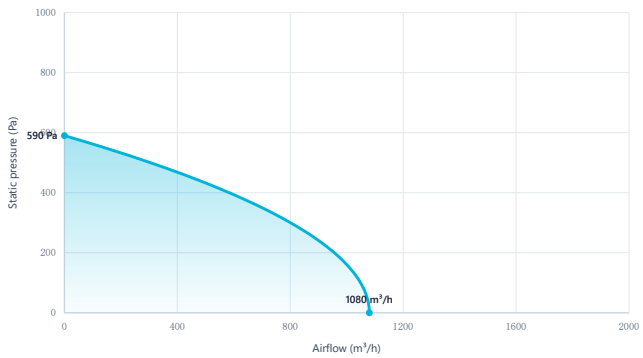

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

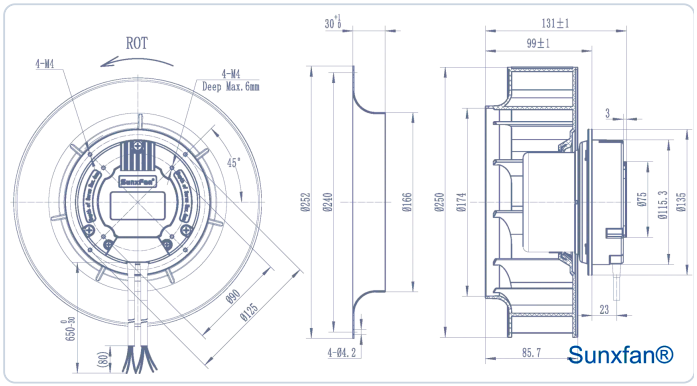

ORDERING INFORMATION

MOQ	**160 PCS**
FOB	**FOB Nansha Guangzhou**
Reference price	**US$45–125**
Lead time	**25-30 days**
Sample	**Sample available**
Payment terms	**TT**
Shipping port	**Nansha Guangzhou OR Yantian Shenzhen**

NOTES

Impeller material: PA Or Galvanized steel plate (powder coating)

 © 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)