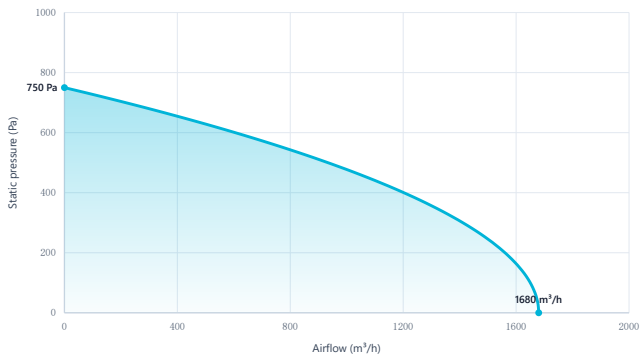
## PRODUCT OVERVIEW



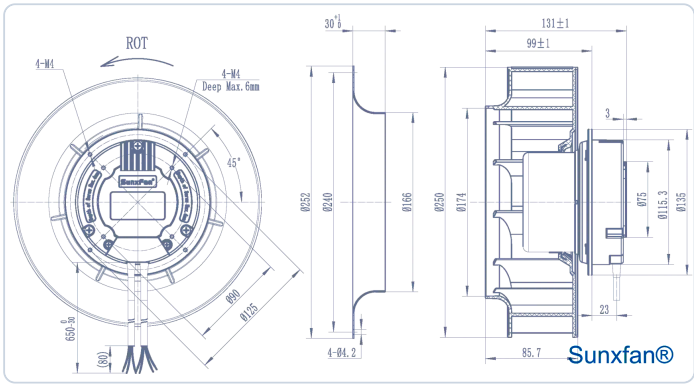

| | |
|---|---|
| Model | BC250A-E092E3-03 |
| Type | EC250 Backward-Curved Centrifugal Fan — 1680 m³/h |
| Motor type | EC |
| Airflow | 1680 m³/h |
| Max. static pressure | 750 Pa |
| Voltage | 230 V AC |
| Power | 240 W |
| Current | — |
| Speed | 3050 r/min |
| Noise | 77 dB(A) |
| Protection class | IP54 |
| Working temperature | -25 °C ~ +60 °C |
| Impeller material | PA6+GF25% |
| Bearing | NSK ball bearing |
| Speed control | 0-10V/PWM, Modbus RTU(RS485) |

## PERFORMANCE CURVES (AT RATED VOLTAGE)




Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

## DIMENSIONS (UNIT: MM)




## ORDERING INFORMATION

| | |
|---|---|
| MOQ | 160 PCS |
| FOB | FOB Nansha Guangzhou |
| Reference price | US$45–125 |
| Lead time | 25-30 days |
| Sample | Sample available |
| Payment terms | TT |
| Shipping port | Nansha Guangzhou OR Yantian Shenzhen |

## NOTES

Impeller material: PA Or Galvanized steel plate (powder coating)


© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)