
PRODUCT OVERVIEW




Model	SF133A-E092A1-01
Type	EC133 Dual intake Centrifugal blower — 1150 m³/h
Motor type	EC
Airflow	1150 m³/h
Max. static pressure	485 Pa
Voltage	115 V AC
Power	125 W
Current	—
Speed	1800 r/min
Noise	66±2 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	Galvanised sheet steel
Bearing	NSK ball bearing
Speed control	0-10V/PWM, 0-5V, 0-6.5V, 4-speed

PERFORMANCE CURVES (AT RATED VOLTAGE)

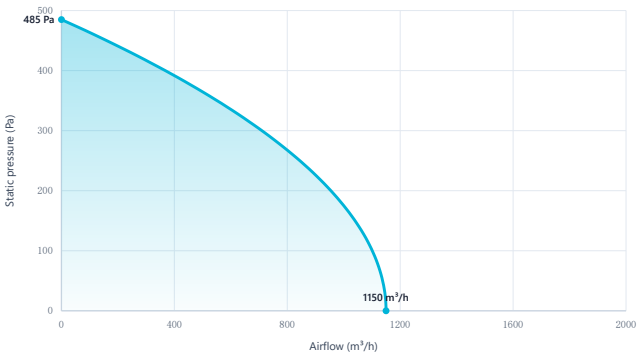

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

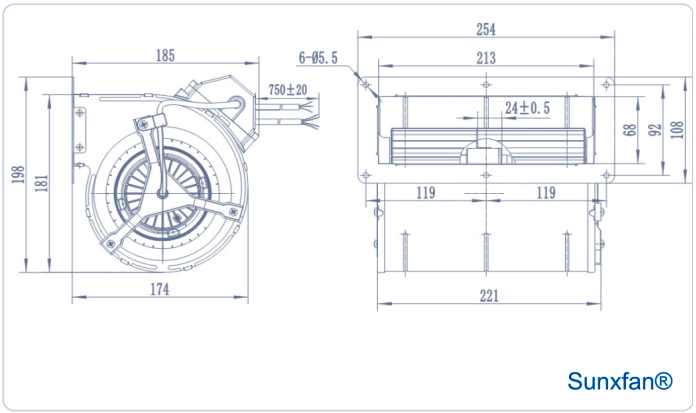

ORDERING INFORMATION

MOQ	80 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$42–85
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Housing and impeller material: galvanized steel plate + electrophoretic black.

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)