
PRODUCT OVERVIEW




Model	SF146A-E092B3-03
Type	EC146 Dual intake Centrifugal blower — 1180 m³/h
Motor type	EC
Airflow	1180 m³/h
Max. static pressure	700 Pa
Voltage	230 V AC
Power	220 W
Current	—
Speed	2200 r/min
Noise	68±1 dB(A)
Protection class	IP42
Working temperature	-25 °C ~ +50 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	0-10V/PWM, 0-5V, 0-6.5V, 3-speed, 4-speed

PERFORMANCE CURVES (AT RATED VOLTAGE)

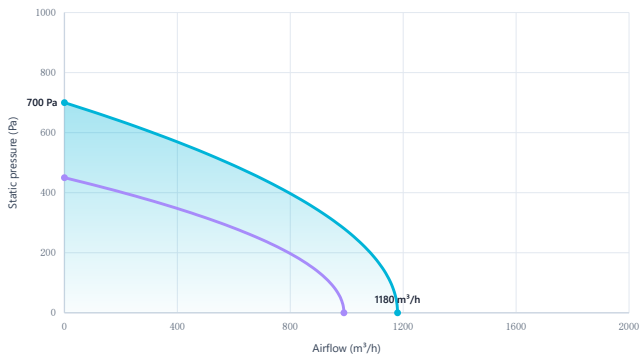

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

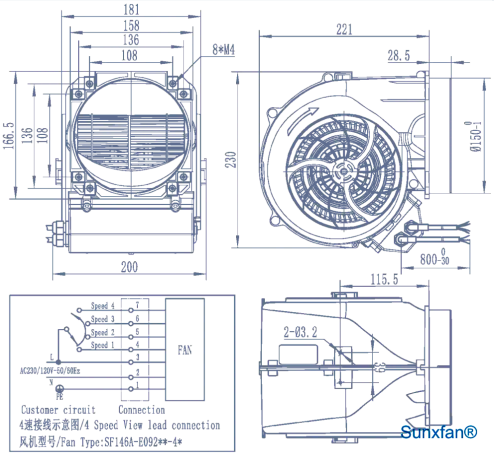

ORDERING INFORMATION

MOQ	120 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$50–120
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Housing and impeller material: PP； CCC,CE,EAC

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)