
PRODUCT OVERVIEW




Model	SF146D-D092A8-01
Type	DC146 Double inlet Centrifugal blower — 1020 m³/h
Motor type	DC
Airflow	1020 m³/h
Max. static pressure	515 Pa
Voltage	48 V DC
Power	165 W
Current	3.3 A
Speed	1800 r/min
Noise	60 dB(A)
Protection class	IP54
Working temperature	-25 °C ~ +60 °C
Impeller material	PA6+GF25%
Bearing	NSK ball bearing
Speed control	0-10V/PWM

PERFORMANCE CURVES (AT RATED VOLTAGE)

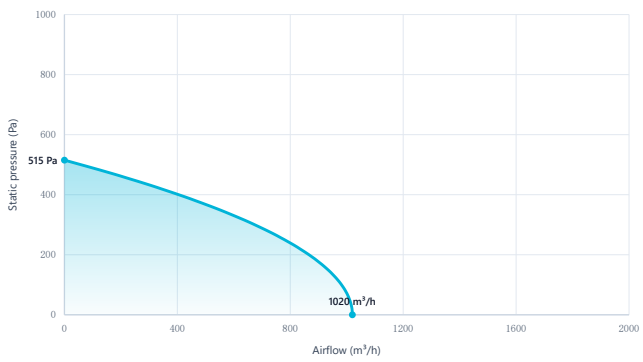

Calculated characteristic derived from the published 0 Pa airflow and maximum static pressure limits; verified points are available on request.

DIMENSIONS (UNIT: MM)

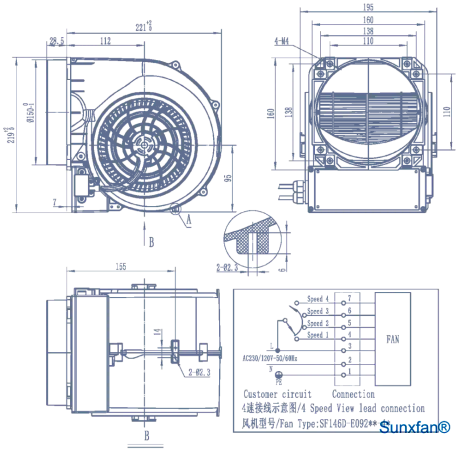

ORDERING INFORMATION

MOQ	120 PCS
FOB	FOB Nansha Guangzhou
Reference price	US$50–150
Lead time	25-30 days
Sample	Sample available
Payment terms	TT
Shipping port	Nansha Guangzhou OR Yantian Shenzhen

NOTES

Housing and impeller material: PP

© 2026 Foshan Sunwind Electric Co., Ltd. (Sunxfan®)